



| | |
|-------------------------|--------------------------------------|
| Engine | Cummins QSM11 |
| Rated Power | 280 kW (376 hp / 381 ps) @ 2,000 rpm |
| Net Power | 260 kW (349 hp / 354 ps) @ 2,000 rpm |
| Engine Bore | 125 mm |
| Engine stroke | 147 mm |
| Grade Ability | 35° |
| Ground Pressure | 65 kPa |
| OPERATING WEIGHT | 46500KG |

CLG950E EXCAVATOR

TOUGH WORLD. TOUGH EQUIPMENT.

CLG950E SPECIFICATIONS >>>

PERFORMANCE PARAMETERS

| | |
|--|--------------------|
| Number of Bucket teeth | 5 |
| Std. Bucket Heaped Capacity (Referenced) | 3.2 m ³ |
| Maximum Travel Speed | 5.3 km/h |
| Swing Speed | 9.3 rpm |
| Drawbar Pull | 386 kN |
| Bucket Digging Force (ISO) | 310 kN |
| Arm Digging Force (ISO) | 287 kN |

ENGINE



| | |
|---------------------|--------------------------------------|
| Emission Regulation | Stage IIIA |
| Maker | Cummins |
| Model | QSM11 |
| Rated Power | 280 kW (376 hp / 381 ps) @ 2,000 rpm |
| Net Power | 260 kW (349 hp / 354 ps) @ 2,000 rpm |
| Peak Torque | 1,898 N·m @ 1,400 rpm |
| Number of Cylinders | 6 |
| Displacement | 10.8 L |

UNDERCARRIAGE

| | |
|-----------------------------------|-------|
| Number of Shoes per Side | 49 |
| Number of Bottom Rollers per Side | 9 |
| Number of Upper Rollers per Side | 2 |
| Shoe width | 800mm |

DIMENSIONS

| | |
|------------------------------------|-----------|
| A Shipping Length | 11,515 mm |
| B Shipping Height | 3,810 mm |
| C Track Gauge | 2,740 mm |
| D Undercarriage Width | 3,540 mm |
| E Length to Center of Rollers | 4,257 mm |
| F Track Length | 5,256 mm |
| G Overall Width of Upper Structure | 3,180 mm |
| H Tail Swing Radius | 3,640 mm |
| I Counterweight Ground Clearance | 1,324 mm |
| J Overall Height o of Cab | 3,307 mm |
| K Min. Ground Clearance | 532 mm |

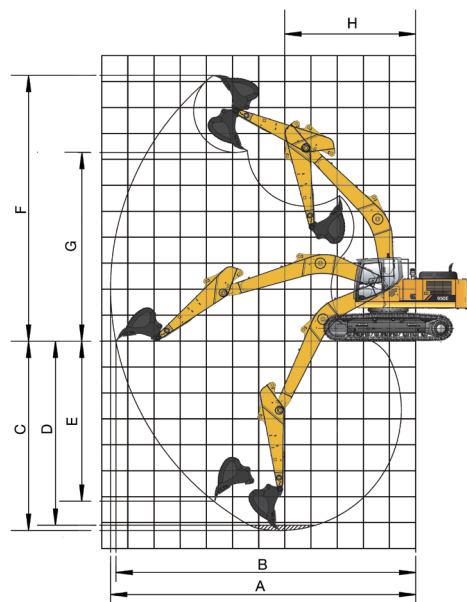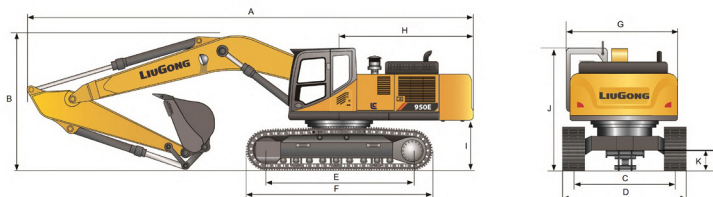

WORKING RANGE

| | |
|---|-----------|
| Boom Length | 6,500 mm |
| Arm Length | 2,550 mm |
| A Max. Digging Reach | 10,625 mm |
| B Max. Digging Reach on Ground | 10,388 mm |
| C Max. Digging Depth | 6,521 mm |
| D Max. Digging Depth, 2.44 m (8') level | 6,337 mm |
| E Max. Vertical Wall Digging Depth | 5,204 mm |
| F Max. Cutting Height | 10,000mm |
| G Max. Dumping Height | 7,038 mm |
| H Min. Front Swing Radius | 4,645 mm |

HYDRAULIC SYSTEM

| | |
|-----------------------|-----------|
| Main Pumps Total Flow | 760 L/min |
| Relief Pressure, main | 34.3 MPa |

SERVICE CAPACITIES

| | |
|------------------------|--------|
| Fuel Tank | 650 L |
| Engine Oil | 37.8 L |
| Cooling System | 50 L |
| Hydraulic Reservoir | 290 L |
| Hydraulic System Total | 470 L |

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124 E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

12/2020 Designed by LiuGong