



<b>Engine</b>	Cummins X12
<b>Max Gross Power</b>	276 kW (370 hp / 375 ps) @ 1,800 rpm
<b>Max Net Power</b>	262 kW (351 hp / 356 ps) @ 1,800 rpm
<b>Operating Weight</b>	31,600 kg (69,666 lbs)
<b>Standard Bucket Size</b>	5.4 m <sup>3</sup> (7.0 yd <sup>3</sup> )
<b>Standard Breakout Force</b>	232 kN (52,156 lbf)
<b>Standard Dump Clearance</b>	3,330 mm (8'10")

# 890H WHEEL LOADER

# 890H SPECIFICATIONS >>>

## ENGINE

Emission Regulation	EU Stage V
Make	Cummins
Model	X12
Max Gross Power	276 kW (370 hp / 375 ps) @ 1,800 rpm
Max Net Power	262 kW (351 hp / 356 ps) @ 1,800 rpm
Peak Torque	1,693 N · m @ 1,400 rpm (1,249 lbf·ft @ 1,400 rpm)
Displacement	11.8 L (3.1 gal)
Number of Cylinders	6
Aspiration	Turbocharged & Air-to-air intercooled

## TRANSMISSION

Transmission Type	Countershaft, power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	38 km/h (23.6 mph)
Maximum Travel Speed, rev	26.5 km/h (16.5 mph)
Number of Speeds, fwd	4
Number of Speeds, rev	3

## AXLES

Differential Front Type	Hydraulic lock differential
Differential Rear Type	Conventional
Axle Oscillation	±11°

## STEERING

Steering Configuration	Articulated
Steering Relief Pressure	20.7 MPa (3,002 psi)

## BRAKES

Service Brake Type	Wet discs brake
Service Brake Actuation	Hydraulic
Parking Brake Type	Disc
Parking Brake Actuation	Electro-hydraulic

## HYDRAULIC SYSTEM

Main Pump Type	Piston
Main Relief Pressure	26 MPa (3,771 psi)
Raise	6.0 s
Dump Time	1.6 s
Float Down Time	3.4 s
Fastest Total Cycle Time	11.0 s

## LOADER ARM PERFORMANCE WITH STANDARD BUCKET 5.4 m³ (7.0 yd³)

Tipping Load - Straight according to ISO 14397-1:2007	23,710 kg (52,272 lbs)
Tipping Load - Full Turn according to ISO 14397-1:2007	20,800 kg (45,856 lbs)
Bucket Breakout Force	232 kN (52,156 lbf)
A Maximum Hinge Pin Height	4,575 mm (15')
B Dump Clearance at Full Height Discharge	3,330 mm (9'10")
C Dump Reach at Full Height Discharge	1,464 mm (4'8")
D Maximum Digging Depth, Bucket Level	125 mm (5")
S <sub>1</sub> Bucket Rollback at Ground Level	45°
S <sub>2</sub> Bucket Rollback at Carry	49°
S <sub>3</sub> Bucket Rollback at Maximum Height	61°
S <sub>4</sub> Maximum Dump Angle at Full Height	45°

## BUCKET PERFORMANCE

Reference Bucket	5.4-9.0 m³ (7.0-11.8 yd³)
------------------	---------------------------

## DIMENSIONS

E Ground Clearance	442 mm (1'5")
G Wheelbase	3,700 mm (12'2")
H Cab Height	3,785 mm (12'5")
J Wheel Tread	2,420 mm (7'11")
K Width Over Tires	3,170 mm (10')
L Length with Bucket Down	9,750 mm (31'12")
M Turn Angle, Either Side	38°
P Rear Angle of Departure	25°
R <sub>1</sub> Turning Radius, Bucket Carry	7,824 mm (25'8")
R <sub>2</sub> Turning Radius, Outside of Tire	6,958 mm (22'7")

## TIRES


Tire Size	29.5R25 ★ L-3
-----------	---------------

## OPERATING WEIGHTS

Operating Weight	31,600 kg (69,666 lbs)
------------------	------------------------

## SERVICE CAPACITY

Fuel Tank	460 L (121.5 gal)
Engine Oil	35 L (9.2 gal)
Cooling System	45 L (1.9 gal)
Hydraulic Reservoir	255 L (67 gal)
Transmission and Torque Converter	50 L (13.2 gal)
Axles, each	65 L (17.2 gal)
Aftertreatment DEF	50 L (13.2 gal)

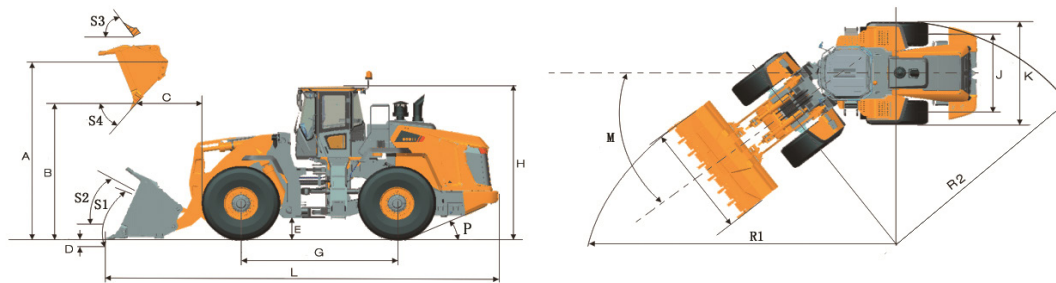

## Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to metric hp in this file (1 kW=1.34 hp).

05/2023 Designed by LiuGong  
Replace the previous versions of 04/2022